

ZOELLER ON-SITE WASTEWATER PRODUCTS

"WW" Residential Effluent Filter P/N 170-0078

BY-PASS PROTECTION

The by-pass sleeve remains in the outlet tee when the main filter is removed for servicing. Solids are prevented from leaving the tank.

ASKETED SEAL


The rubber gasket ensures that all effluent passes through the filter, not around it. It provides protection in all commonly found outlet tees.

DEEP PLEATED CONSTRUCTION

This design adds more effective filter area than any other 4" filter on the market. Pleats retain solids to aid in servicing.

CLEAR ZONE ACCESS

When installed in the tee, filter pulls effluent from only the "clear zone" of the tank.

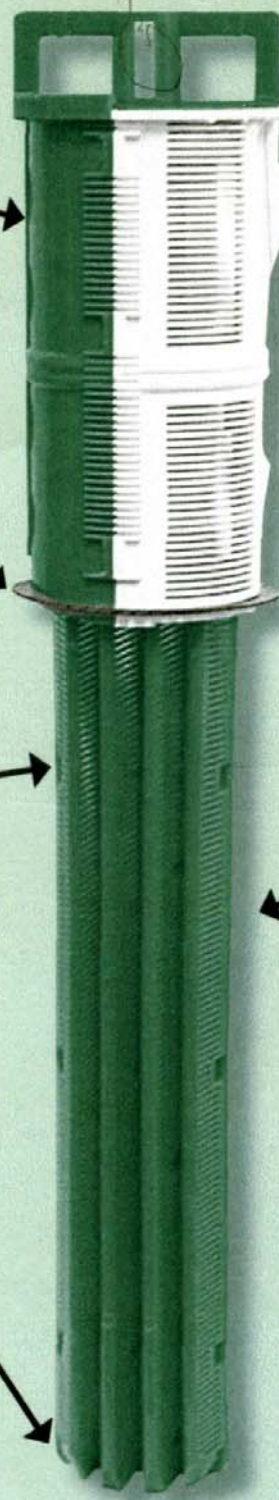

TWIST LOCK MECHANISM

Inner cartridge is held firmly in place, but can be easily removed for servicing.

LOCKING TAP

Zoeller invented the locking tap to prevent the filter from floating out and keep the by-pass sleeve in place when servicing.

SUPERIOR FILTRATION

All 132 linear feet of 1/16" filtration is located below the water line, making the filter 100% effective.



Available with sanitary tee and filter complete.

170-0144

Covered by US Patent Nos.
6,136,190; 6,331,247; 6,495,040.